


- NOTES:
- 1 ALUMINUM BALLISTIC CAPTURE FRAME W/ POWDER COAT FINISH
 - 2 16 GAUGE STAINLESS STEEL DEAL TRAY
 - 3 CLEAR BULLET RESISTANT MATERIALS SPECIFY UL 752 LVLS I THRU III (HIGHER LVLS AVAIL. IN GLASS CLAD POLY)
 - 4 NATURAL VOICE PORT FOR SOUND TRANSMISSION INCLUDES BACK PLATE THAT OVERLAPS MIN OF 2"
 - 5 BALLISTIC LINED COUNTER TOP MADE OF PLASTIC LAMINATE W/ PHENOLIC BACKING MULTIPLE COLORS (STAINLESS STEEL COUNTER ALSO AVAILABLE UPON REQUEST)
 - 6 MOUNTING HOLES ON PROTECTED SIDE OF THE FRAME FOR ADDED SECURITY

ISOMETRIC


NTS

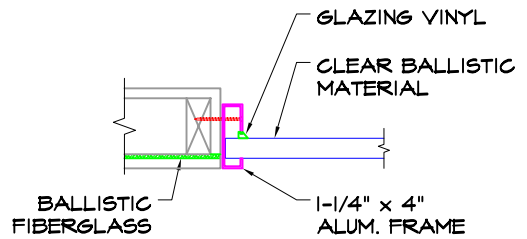

A ALUMINUM JAMB


SIM @ HEAD

NTS




PLAN

NTS



ELEVATION

REQUIRED FINISH OPENING = NTS
 WIDTH + 1/4"
 HEIGHT + 1/8"

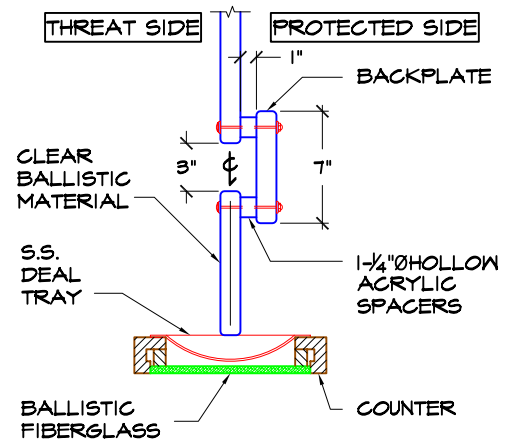

B SECTION @ DEAL TRAY

NTS

TRANSACTION WINDOW WITH HORIZONTAL VOICE PORT. SPECIFY LEVEL OF PROTECTION. SIZES AVAILABLE UP TO 8'w x 5'h.

Bullet Guard

Design, Manufacture, Fabrication & Installation of Ballistic Product
 www.bulletguard.com

MODEL # TWHVP
 BULLET RESISTANT TRANSACTION WINDOW
 WITH HORIZONTAL VOICEPORT